

SPECIFICATION FOR APPROVAL
Switching power Supply

CUSTOMER: _____

DESCRIPTION: _____ **Output: DC12V1.5A**

OUR MODEL NO: _____ **BSG-1201500**

SAMPLE NO: _____ **DATE:** _____ **2017-2-28**

SAMPLE COLOR:Black **White**

APPROVAL SIGNATURE/		
APPROVED BY	CHECKED BY	TESTED BY

Manufacturer		
SALES	APPROVED BY	DESIGNED BY

Rev. List			
Rev.	Date	Description	Design
V1.0	2017-2-28		

Table of contents

1、 DESCRIPTION.....3

2、 INPUT CHARACTERISTICS3

3、 OUTPUT CHARACTERISTICS.....4-5

4、 PROTECTION FUNCTION.....5

5、 ENVIRONMENTAL REQUIREMET.....5~6

6、 SAFETY AND EMC REQUIREMENT..... 6

7、 MECHANICAL REQUIREMENT.....7

8、 CORD 8

9、 PACKING..... 9

ICbanQ Inc.

Tel:82-070-7019-3947 Email:Tommy@icbanq.com

Our model:BSG-1201500

Customer:

Date2017-2-28

SAMPLE No:

1、 DESCRIPTION:

The purpose of the document is to specify the functional requirements of a 18W switching power supply.

2、 INPUT CHARACTERISTICS:

2.1 Input Voltage:

Rated Voltage:100~240Vac

Variation Range:90-264Vac

2.2 INPUT FREQUENCY:

Rated Frequency: 50/60Hz.

Variation Frequency:47-63Hz

2.3 INPUT CURRENT:

0.3Amps max At any input voltage and rated, DC output rated load.

2.4 INRUSH CURRENT:

50 Amps Max. Cold start at 240Vac input, with rated load and 25°C ambient.

2.5 AC LEAKAGE CURRENT

0.25mA Max.At240Vac input.

3、OUTPUT CHARACTERISTICS:

3.1 Power output

Voltage	Min. Load	Rated. Load	Peak	Output power
12Vdc	0.00A	1.5A	1.5A	18W

3.2 Combined Load/Line Regulation

Voltage	Min. Voltage	Max. Voltage	Line Regulation	Load Regulation
12Vdc	11.4V	12.6V	± 1%	± 5%

3.3Ripple and Noise:

Under nominal voltage and nominal load,the ripple and noise are as follows when measure with Max.Bandwidth of 20MHz and Parallel 47uF/0.1uF,crossed connected at testing point.

Voltage _____ Ripple and Noise(Max.)

+12Vdc 120mV p-p

3.4 Turn on delay time:

3Second Max.at 115Vac input and output Max.load.

3.5 Rise time:

40 mS Max.at 115Vac input and output Max load.

3.6 Hold up time:

5 mS Min.at 115Vac input and output Max.Load.

3.7 Average Effiviency

Average Effiviency 88Min, At 115/230Vac input and output 100%Load 75%Load 50%Load 25%Load Adapter meet efficiency Level VI

ICbanQ Inc.

Tel:82-070-7019-3947 Email:Tommy@icbanq.com

Our model:BSG-1201500

Customer:

Date2017-2-28

SAMPLE No:

4、PROTECTION FUNCTION:

4.1 Short circuit test:

The power supply will be auto recovered when short circuit faults remove.

4.2 Over current Protection:

The power supply will be auto recovered when over current faults remove.

4.3 Over Voltage Protection:

The power supply will auto recovered when faults remove 120%~170%.

5、ENVIRONMENTAL REQUIREMET:

5.1 Operating Temperature:

0°C to 40°C,Full load, Normal operation.

5.2 Storage Temperature:-20°C to 80°C

With package

5.3 Relative Humidity:

5%(0°C)~90%(40°C)RH,72Hrs,Full load, Normal operating.

5.4 Vibration:

Operating: IEC 721-3-3 3M3

5~9Hz,A=1.5mm

(9~200Hz,Acceleration 5m/S²)

2. Transportation:

IEC 721-3-2 2M2

5-9Hz,A=3.5mm

9~200Hz,**Acceleration=5m/S²**

200~500Hz,**Acceleration=15m/S²**

ICbanQ Inc.

Tel:82-070-7019-3947 Email:Tommy@icbanq.com

Our model:BSG-1201500

Customer:

Date2017-2-28

SAMPLE No:

3. Axes,10 cycles per axis.

No permanent damage may occur during testing.

The SAMPLE has to restore to its original situation after power off/on..

5.5 Dropping Packed:

1M for wallmount type and 760mm for desktop type as above described.

The horizontal surface consists of hardwood at least 13mm thick, mounted on two layers of plywood

each 19mm to 20mm thick,all supported on a concrete or equivalent non-resilient floor.

6、 SAFETY REQUIREMENT:

6.1

Safety: accord with UL/CUL-(UL60950-1),TUV/GS-(EN60950-1),CCC-(GB4943) ,

PSE- (J60950-1),KC-(K60950-1)

6.2 DIELECTRIC STRENGTH Hi-Pot:

Primary to secondary:3000Vac10mA/3S for type test.

6.3 Insulation resistance:

/Primary to secondary:10MΩ min at 500V DC.

6.4 EMI STANDARD

Meets the Limits of

<1>.Fcc part15 class B rules

<2>.EN55022 class B rules

<3>.GB9254-1998,GB17625.1-2003

ICbanQ Inc.

Tel:82-070-7019-3947 Email:Tommy@icbanq.com

Our model:BSG-1201500

Customer:

Date2017-2-28

SAMPLE No:

7、 **MECHANICAL REQUIREMENT:**

7.1 Enclosure:

The power supply size:75x 30 x 40mm;



ICbanQ Inc.

Tel:82-070-7019-3947 Email:Tommy@icbanq.com


Our model:BSG-1201500

Customer:

Date2017-2-28

SAMPLE No:

8、CORD:

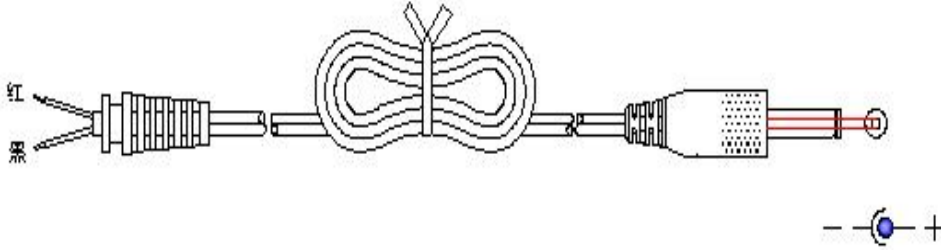

L=1.05M 2464 20#0.5 5.5*2.1*10mm

ICbanQ Inc.

Tel:82-070-7019-3947 Email:Tommy@icbanq.com

Our model:BSG-1201500

Customer:

Date2017-2-28

SAMPLE No:

9、PACKING:

